

A

B

C

D

E




A

B



C

D

E

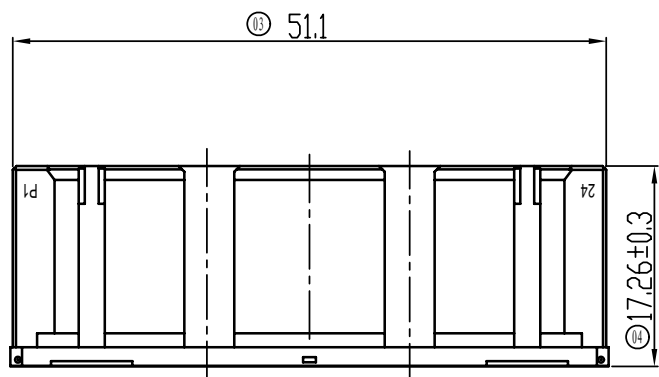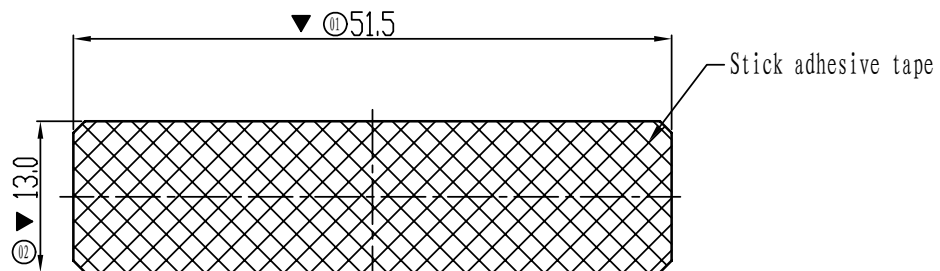

Stick adhesive tape

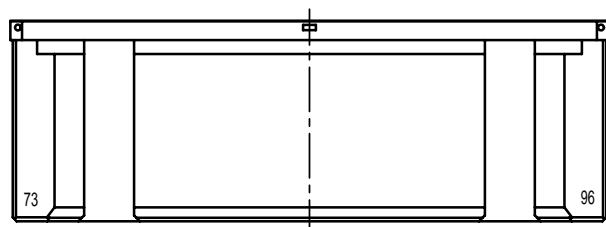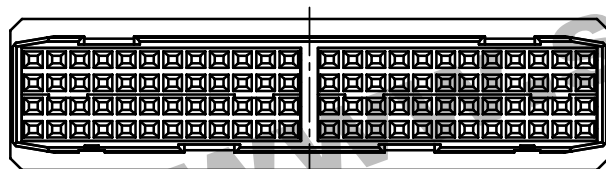

Performance characteristics:

1. Main body part material
Insulator: PBT Black UL94V-0
Adhesive tape: PET Black
2. Environment specification
Working temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
3. Packing & storing
Method of packing: box, inner box, outer box
Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
4. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^{\circ}$
.X	± 0.38	.X °	$\pm 2^{\circ}$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date	4X24 Male Dust cap	SL0.1809.104			
DRAW			Lawrence	2013.02.25		Projection	Rev.	Weight	Scale
CHK							A0		
MAN						All Dimensions in mm Sheet 1 of 1			
STD					18096001	SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP									