
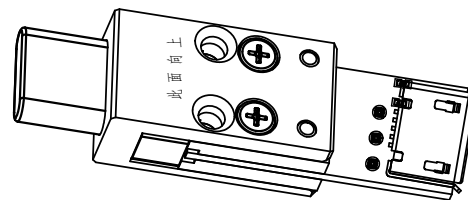


测试座线路图

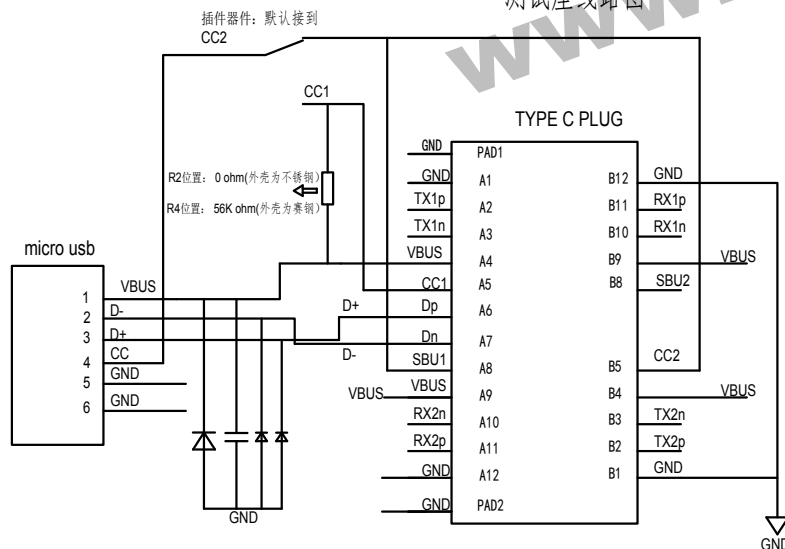

3D VIEW

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1. Main body part material

Insulator:

TYPE C : PA9T

Micro B: LCP

Contact terminal: COPPER ALLOY

Crust: SUS

Structural member: SUS And POM

2. Electrical requirements:

Current rating: 2 A

Voltage rating: 5 V

Contact resistance: $\leq 90 \text{ m}\Omega$

Insulation resistance: $\geq 100 \text{ M}\Omega$

Withstanding voltage: 100 Vr.m.s, 1mA, 60s

3. Mechanical requirements

Insertion force: 8N~12N

Extraction force: 8N~12N

Mechanical life: 10000 cycles

4. Environment specification

Working temperature: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Resistance to soldering heat: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 10s

5. Packing & storing

Method of packing: box, outer box

Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity

6. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

					SL0. 1625. 006			
					USB TYPE C 180° test fixture connection head			
					16256111			
					All Dimensions in mm Sheet 1 of 1			
					SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			