



RECOMMENDED PCB LAYOUT

Performance characteristics:

- 1.Main body part material
Contact terminal: Brass (C2680), 1.27μm Ni under plated, outer plating Matte Sn 3 ~ 5μm .
- 2.Electrical requirements:
Current rating: 10 A
Contact resistance: ≤ 10 mΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- 3.Environment specification
Working temperature: -40℃ ~ 125℃
Humidity: ≤ 93% at 40℃
- 4.Packing & storing
Method of packing: reel
Storing condition: temperature of -10℃ ~ +40℃ below 80% relative humidity
- 5.Style of installation:SMT
- 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

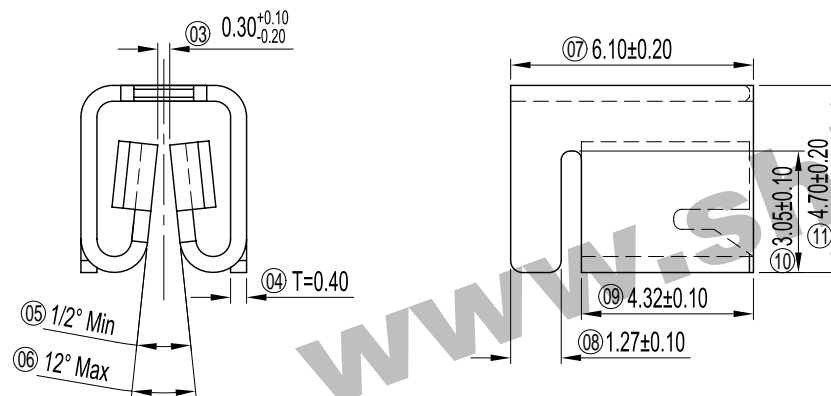

With Mylar
PN:19163007



Without Mylar
PN:19163008

With / Without Mylar Also available in Carrier Tape

Unless otherwise specified tolerance:



X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date
DRAW		An.Cheng		2013.04.22
CHK				
MAN				
STD				
APP				

SMT Top or Horizontal-Entry
Universal Tab Receptacle

19163007
19163008

SL0.1916.001

Projection	Rev.	Weight	Scale
	A0		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO., LTD.			