


PCB LAYOUT

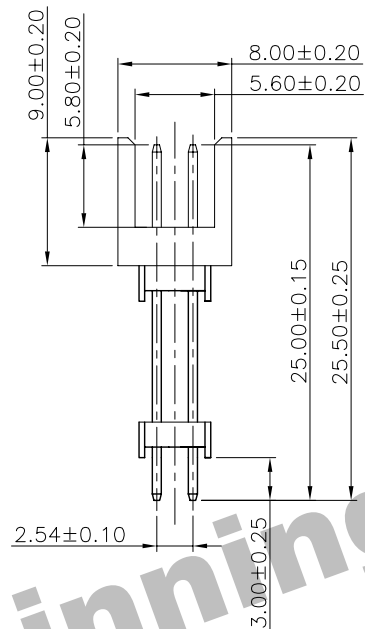

PERFORMANCE CHARACTERISTICS:

1. MAIN BODY PART MATERIAL

INSULATOR: PBT, BLACK, UL94V-0

CONTACT TERMINAL: BRASS, PLATING 0.76μm Au ON CONTACT AREA,
PLATING 3~5μm Sn ON THE SOLDER AREA

2. ELECTRICAL REQUIREMENTS

CURRENT RATING: 3 A

VOLTAGE RATING: 250 V

CONTACT RESISTANCE: ≤ 20 mΩ

INSULATION RESISTANCE: ≥ 1000 MΩ

WITHSTANDING VOLTAGE: 1000 Vr.m.s, 1mA, 60s

3. ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -25℃ ~ +125℃

4. PACKING & STORING

METHOD OF PACKING: PLASTIC BAG

STORING CONDITION: TEMPERATURE OF -10℃ ~ +40℃
BELOW 80% RELATIVE HUMIDITY

5. STYLE OF INSTALLATION: SOLDER PCB INSTALLATION



6. TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO

RoHS AGREEMENT: CONTENT

TECHNICS: LEAD-FREE

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

					1234 SERIES 2.54 PITCH STACKER HEADER	SL0.1234.001				
MARK NO.	FILE NO.	SIGNATURE	DATE			PROJECTION	REV.	WEIGHT	SCALE	
DRAW	J. Y. XU	2007. 6. 2					A0			
CHK	J. G. ZHOU	2007. 6. 2				SHEET 1		OF 1		
MAN	J. G. ZHOU	2007. 6. 2			1234-201-21-1	 SHENZHEN SHINNING ELECTRONICS CO.,LTD.				
STD	Helen Wang	2007. 6. 2								
APP	James He	2007. 6. 3								