


PERFORMANCE CHARACTERISTICS

- 1.MAIN BODY PART MATERIAL
INSULATOR PBT (UL94V-0)BLACK
CONTACT TERMINAL BRASS,CONTACT AREA Au0.3um,
PLATING 3~5um Sn ON THE SOLDER AREA
- 2.ELECTRICAL REQUIREMENTS
CURRENT RATING 3 A
CONTACT RESISTANCE ≤20 mΩ
WITHSTANDING VOLTAGE 1000 Vr.m.s, 1mA, 60s
INSULATION RESISTANCE:≥1000 MΩ
- 3.ENVIRONMENT SPECIFICATION
WORKING TEMPERATURE -55°C~+125°C
HUMIDITY ≤93% at 40°C
- 4.PACKING & STORING
METHOD OF PACKING PLASTIC BAG/BOX
STORING CONDITION TEMPERATURE OF
-10°C~+40°C BELOW 80% RELATIVE HUMIDITY
- 5.STYLE OF INSTALLATION SOLDER PCB
- 6.TO PREVENT THE POLLUTION OF THE ENVIRONMENT
PRODUCT INFO
RoHS AGREEMENT:CONTENT
TECHNICS:LEAD-FREE



UNLESS OTHERWISE
SPECIFIED TOLERANCE

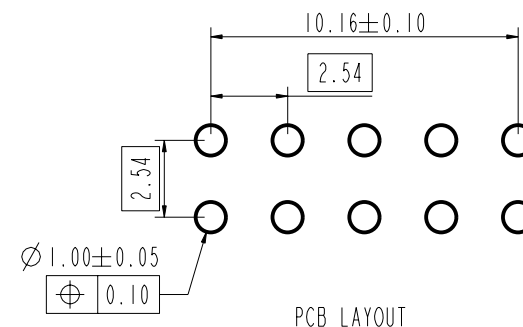

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

MARK	NO.	FILE NO.	SIGNATURE	DATE
6		GCP		06.23.08
DRAW		GCP	2008.06.03	
CHK				
MAN				
STD				
APP				

2.54 PITCH STACKER HEADER

1234-104-20-2

SLO.1234.004

PROJECTION	REV.	WEIGHT	SCALE
	A1		3:1
SHEET 1		1 OF 1	
 SHENZHEN SHINNING ELECTRONICS CO., LTD			