

1. Main body part material
 Insulator: See part number rule
 Contact terminal: Brass, 1.27 μ m Ni under plated,
 outer plating see spec list


Withstanding voltage: 500 Vr.m.s, 1mA, 60s

⑥ Retention: $\geq 7\text{N/pin}$ (befor 265°C reflow soldering)
 $\geq 5\text{N/pin}$ (after 265°C reflow soldering)


Resistance to soldering heat: 260°C, 30s

Storing condition: temperature of $-10^{\circ}\text{C}\sim+40^{\circ}\text{C}$
below 80% relative humidity

7.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

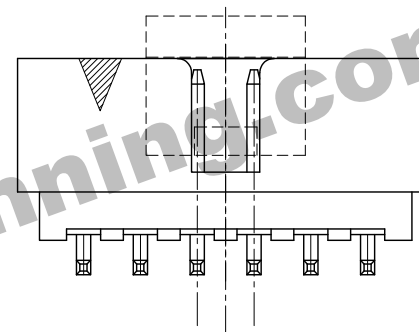



04~12Pin position profile

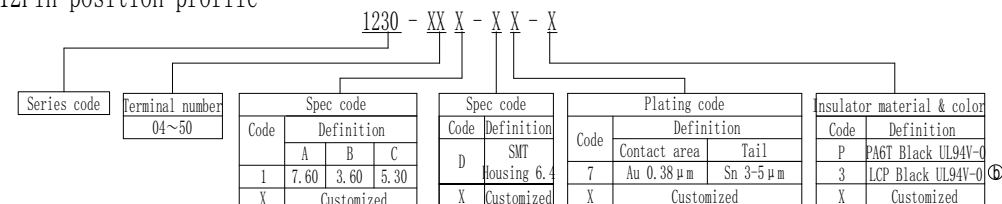

X.	± 0.50	X. $^{\circ}$	$\pm 3^{\circ}$
.X	± 0.38	.X $^{\circ}$	$\pm 2^{\circ}$
.XX	± 0.25		

①	3	151876	Change Yu	2016.9
②	2	89341	孔德宇	2016.1
Mark	NO.	File NO.	Signature	Date
	DRAW	Deyu Kong2015.12.25		
	CHK	Alan2016.10.10		
	MAN			
	STD	Eva2016.10.11		
	APP	Jiang2016.10.11		

1230-XXX-DX-X

SL0.1230.005			
Projection	Rev.	Weight	Scale
	A2		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			