

No.	A1/A2	B1/B2	C1/C2	D1/D2	P/N
1	17.92	16.30	11.90	7.62	1150-028-02-4
2	17.92/20.52	16.30/18.90	11.80/14.40	7.62/10.16	1150-032-02-4
3	23.40	21.70	17.20	12.70	1150-044-02-4
4	25.80	24.10	19.50	15.24	1150-052-02-4
5	31.00	29.35	24.68	20.32	1150-068-02-4
6	36.00	34.30	29.68	25.40	1150-084-02-4

UNLESS OTHERWISE SPECIFIED
TOLERANCE

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

PERFORMANCE CHARACTERISTICS:

1.MAIN BODY PART MATERIAL

INSULATOR: PPS BROWN UL94V-0

CONTACT TERMINAL: PHOSPHOR BRONZE, 3-5μm Sn

2.ELECTRICAL REQUIREMENTS

CURRENT RATING: 1 A

CONTACT RESISTANCE: ≤30 mΩ

INSULATION RESISTANCE: ≥1000 MΩ

WITHSTANDING VOLTAGE: 500 Vr.m.s, 1mA, 60s

3.MECHANICAL REQUIREMENTS

MECHANICAL LIFE: 25 CYCLES

4.ENVIRONMENT SPECIFICATION

WORKING TEMPERATURE: -55℃ ~+110℃

HUMIDITY: ≤93% at 40℃

RESISTANCE TO SOLDERING HEAT: 260℃±5℃, 10s

5.PACKING & STORING


METHOD OF PACKING: TUBE, INNER BOX, OUTER BOX

STORING CONDITION: TEMPERATURE OF -10℃ ~+40℃
BELOW 80% RELATIVE HUMIDITY













6.STYLE OF INSTALLATION: SOLDER PCB INSTALLATION

7.TO PREVENT THE POLLUTION OF THE ENVIRONMENT PRODUCT INFO

RoHS AGREEMENT: CONTENT

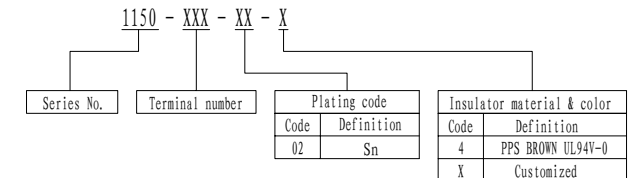

					PLCC Sockets Solder tail	SL0.1150.100			
						PROJECTION	REV.	WEIGHT	SCALE
MARK	NO.	FILE NO.	SIGNATURE	DATE			A0		
DRAW		CHXIE 2008.09.27							
CHK									
MAN									
STD					1150	SHEET 1		OF 2	
APP						SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			

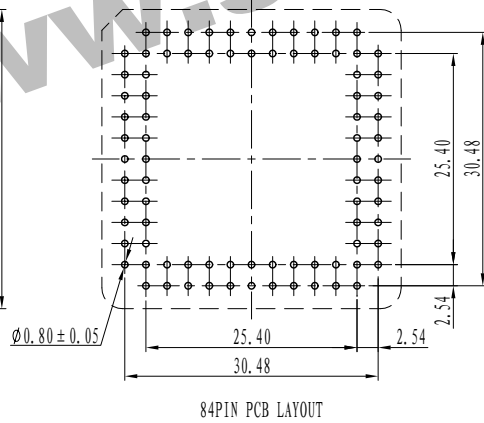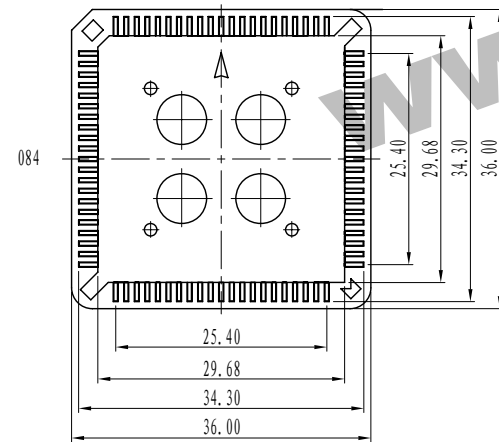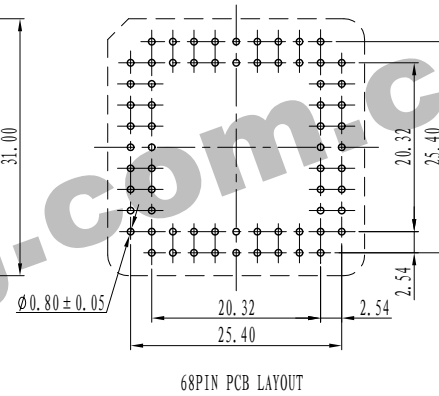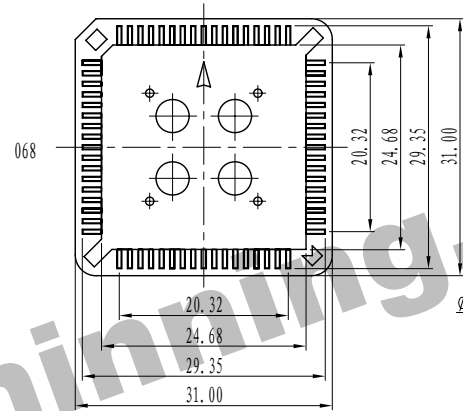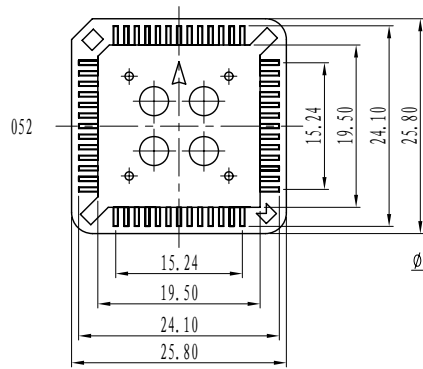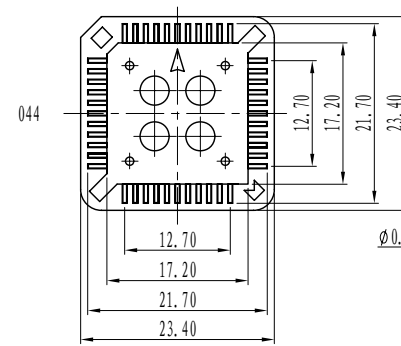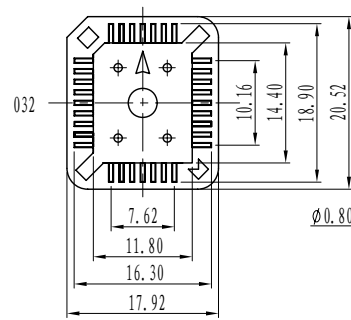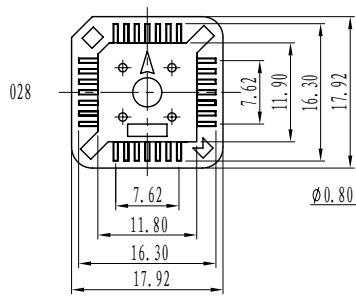

UNLESS OTHERWISE SPECIFIED
TOLERANCE



X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

MARK	NO.	FILE NO.	SIGNATURE	DATE
DRAW	CHXIE 2008.09.27			
CHK				
MAN				
STD				
APP				

PLCC Sockets
Solder tail

1150

SL0.1150.100

PROJECTION	REV.	WEIGHT	SCALE
	A0		
SHEET 2		OF 2	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			