



N=NUMBER OF CONTACTS



PCB LAYOUT

Performance characteristics:

1.Main body part material

Insulator:PBT black UL94V-0

Contact terminal: CuSn6,1.27~2.0μm Ni under plated,
outer plating Sn2~4μm

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1ma, 60s

3.Mechanical requirements

Retention: ≥10 N/pin

4.Environment specification

Working temperature: -55℃~+125℃

Humidity: <93% at 40℃

5.Packing & storing

Method of packing: Plastic bag, inner box, outer box


Storing condition: Temperature of -10℃~+40℃

below 80% relative humidity

6.Style of installation: Press-fit pcb Installation



7.To prevent the pollution of the environment product info

RoHS agreement:In line with the european union RoHS.

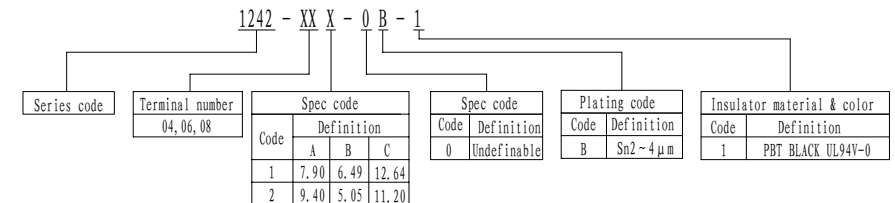

Unless otherwise specified tolerance:

X.	±0.50	X. _o	±3°
.X	±0.38	.X _o	±2°
.XX	±0.25		

					2.54mm pitch double row angle pin press-fit	SL0.1242.001					
Mark	NO.	File NO.	Signature	Date		Projection	Rev.	Weight	Scale		
DRAW	LinZhao 2013.10.08						A0				
CHK											
MAN					Sheet 1			1 of 1			
STD					 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.						
APP											
1242-XXX-0B-1											